

# SUPERIOR CLEANING



**Ergonomic  
design**



**Fast drying  
cyclus**



**Large  
opening**



**Low electricity  
consumption**

## FEATURES

- ✓ **Standard stainless steel drum with large diameter**
- ✓ **Easy control - Easy to use microprocessor**
- ✓ **Combination of Radial and Axial airflow:**
  - maximal heat transfer
  - low energy consumption
  - short drying time
- ✓ **Large door opening for easy loading and unloading**

## OPTIONS

- **Coin operated version**
- **Reversing drum**
- **Professional control - Full control programmer**
- **Residual moisture control:**
  - safe drying of delicate linen
  - humidity detection in %
  - ideal for dry cleaners, fire depts
  - available on Easy and Professional control




# SUPERIOR CLEANING

## DIMENSIONS & SPECIFICATIONS

<b>CAPACITY</b>	Capacity	<b>kg</b> 13
	Drum volume	<b>litres</b> 285
	Drum diameter	<b>mm</b> Ø760
	Number of drums	1
	Number of loading doors	1
<b>AIRFLOW</b>		<b>m<sup>3</sup>/h</b> 550
<b>DRYING AVERAGE</b>		<b>g/min</b> 225
<b>MOTOR</b>	Fan	<b>kW</b> 0,55
	Drive	<b>kW</b> 0,25
<b>GAS HEATING</b>	Gas connection	<b>NPT</b> 3/4"
	Electrical connection	<b>3x 220-240V</b> 50 Hz
		<b>1x 220-240V</b> 50 Hz
		<b>3x 380-415V</b> 50 Hz
	Energy	<b>kW</b> 19,5 <b>kBTU/h</b> 66,5
<b>STEAM HEATING</b>	Steam connection	<b>NPT</b> 3/4"
	Electrical connection	<b>3x 220-240V</b> 50 Hz
		<b>1x 220-240V</b> 50 Hz
		<b>3x 380-415V</b> 50 Hz
	Steam output *	<b>kW</b> 19,5-27
Steam pressure	<b>bar</b> 3-6/7-10	
<b>ELECTRICAL HEATING</b>	Electrical connection	<b>3x 220-240V</b> 50 Hz
		<b>3x 380-415V</b> 50 Hz
		<b>3x 480V</b> 60 Hz
Energy	<b>kW</b> 18	
<b>PROGRAMMER</b>	Easy control - antivandal (ECT)	standard
	Professional control (FCT)	available
<b>EXHAUST</b>		<b>mm</b> Ø200
<b>DIMENSIONS</b>	Size HxWxD	<b>mm</b> 1680x795x1160
<b>TRANSPORT DATA</b>	Gross weight	<b>kg</b> 265
	Net weight	<b>kg</b> 250
	Packing HxWxD	<b>mm</b> 1785x855x1190

Standard = Standard version. \* Steam output is flexible depending on steam pressure.

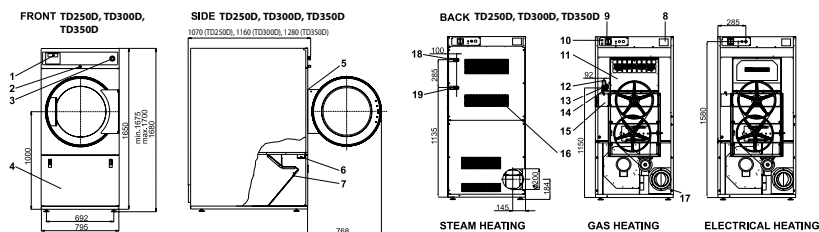

1. Programmer
2. Lock of the control panel
3. Emergency stop button (not applicable for version with coin meter)
4. Lint screen cover
5. Door lock microswitch
6. Lint cover microswitch
7. Lint screen
8. Name plate
9. Main switch
10. Main power supply
11. Heating chamber
12. Gas valve (G models only)
13. Pressure regulator (G models only)
14. Gas supply (G models only)
15. Airflow switch
16. Suction
17. Exhaust piping
18. Steam supply
19. Condense drain

